

Case Study: Water Recommissioning


Panorama Crt

Project Overview

Multi-residential building
223 suites, estimated 1204 people (5.4 ppl/suite)

Recommissioning completed April 23 - May 4, 2018

- High-efficiency showerheads and faucet aerators installed
- Toilet flappers replaced and toilets adjusted
- Leaking fixtures repaired or replaced

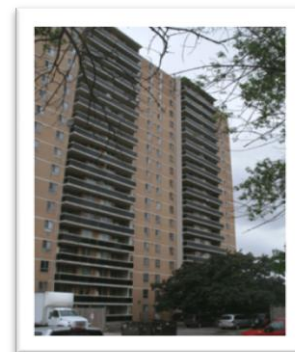


Project Results

Water Savings: \$110,800/yr (28%)
Natural Gas Savings: \$36,600/yr (28%)
Total Utility Savings: \$147,400/yr


Project Cost: \$35,800 (before HST)
Simple Payback: 3 months

Annual Utility Costs

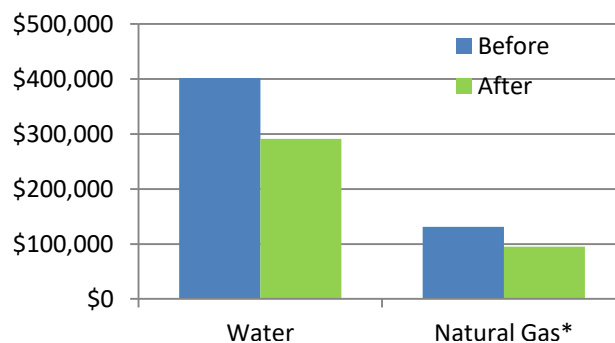

*Estimated natural gas used for heating DHW

Daily Water Consumption

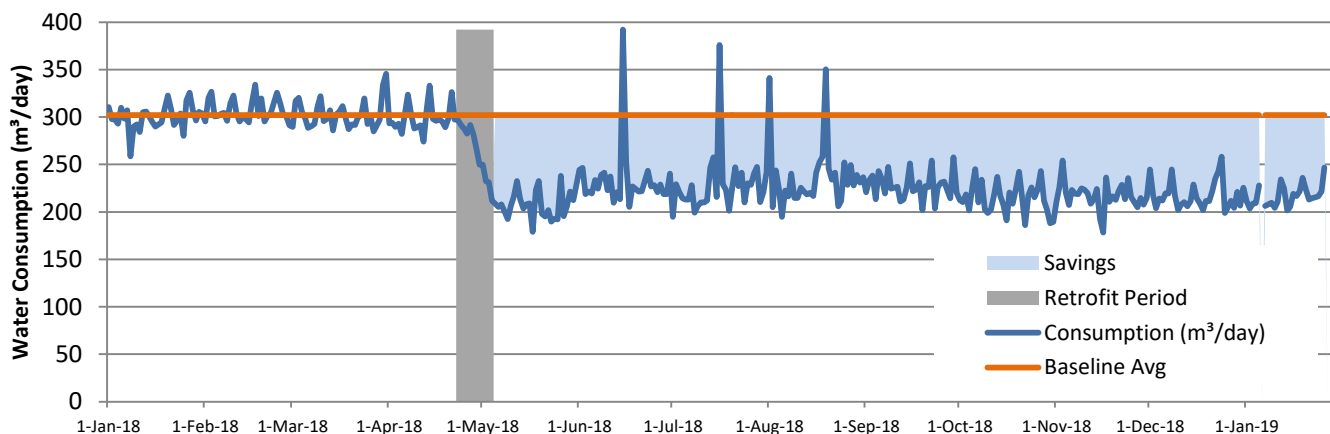

Watershed Technologies Inc. 477A Dupont St., Toronto, Canada, M6G 1Y6
www.watershed.ca tel: 416-538-7940 email: info@watershed.ca